

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

This Page Blank (uspto)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : G06F 9/38	A1	(11) International Publication Number: WO 94/16384 (43) International Publication Date: 21 July 1994 (21.07.94)
<p>(21) International Application Number: PCT/US93/12308</p> <p>(22) International Filing Date: 16 December 1993 (16.12.93)</p> <p>(30) Priority Data: 07/997,948 31 December 1992 (31.12.92) US</p> <p>(71) Applicant: S-MOS SYSTEMS, INC. [US/US]; 2460 North First Street, San Jose, CA 95131 (US).</p> <p>(72) Inventors: DEOSARAN, Trevor, A.: 555 East Washington Avenue, Sunnyvale, CA 94086 (US). GARG, Sanjiv; 46820 Sentinel Drive, Fremont, CA 94539 (US). IADONATO, Kevin, R.; 678 Galleon Court, San Jose, CA 95133 (US).</p> <p>(74) Agent: WERNER, Raymond, J.; S-MOS Systems, Inc., 2460 North First Street, San Jose, CA 95131 (US).</p>		<p>(81) Designated States: JP, KR, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report.</i></p>
<p>(54) Title: SYSTEM AND METHOD FOR REGISTER RENAMING</p> <p>(57) Abstract</p> <p>A system and method for performing register renaming of source registers in a processor having a variable advance instruction window for storing a group of instructions to be executed by the processor, wherein a new instruction is added to the variable advance instruction window when a location becomes available. A tag is assigned to each instruction in the variable advance instruction window. The tag of each instruction to leave the window is assigned to the next new instruction to be added to it. The results of instructions executed by the processor are stored in a temp buffer according to their corresponding tags to avoid output and anti-dependencies. The temp buffer therefore permits the processor to execute instructions out of order and in parallel. Data dependency checks for input dependencies are performed only for each new instruction added to the variable advance instruction window and register renaming is performed to avoid input dependencies.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

System and Method for Register Renaming

Cross-Reference to Related Applications

The following are related, commonly owned, co-pending applications:

Superscalar RISC Instruction Scheduling, Serial No. 07/860,719, filed March 31, 1992;

Semiconductor Floor Plan and Method for a Register Renaming Circuit, Serial No. 07/860,718, filed March 31, 1992;

System and Method for Retiring in a Superscalar Microprocessor, Serial No. 07/877,451, filed 5/15/92;

High Performance RISC Microprocessor Architecture, Serial No. 07/817,810, filed 1/8/92;

Extensible RISC Microprocessor Architecture, Serial No. 07/817,809, filed 1/8/92.

The above cited patent documents are incorporated herein by reference.

Background of the Invention

1. Field of the Invention

The present invention relates to superscalar reduced instruction set computers (RISC), more particularly, the present invention relates to a register renaming circuit for superscalar RISC computers.

2. Related Art

A more detailed description of some of the basic concepts discussed in this application is found in a number of references, including Mike Johnson, *Superscalar Microprocessor Design* (Prentice-Hall, Inc., Englewood Cliffs, New Jersey, 1991) (hereafter Johnson); John L. Hennessy et al., *Computer Architecture - A Quantitative Approach* (Morgan Kaufmann Publishers, Inc., San Mateo, California, 1990). Johnson's text, particularly Chapters 2, 6 and 7 provide an excellent discussion of the register renaming issues addressed by the present invention.

A major consideration in a superscalar RISC processor is to how to execute multiple instructions in parallel and out-of-order, without incurring data errors due to dependencies inherent in such execution. Data dependency checking, register renaming and instruction scheduling are integral aspects of the solution. A detailed discussion of storage conflicts, register renaming and dependency mechanisms is

found in commonly owned, co-pending U.S. patent application Ser. No. 07/860,719, filed March 31, 1992, (hereafter referred to as the '719 application).

The '719 application discloses a register renaming circuit (RRC) having a fixed instruction window. In the fixed instruction window, dependency checking and resource assignment is done on the same set of instructions until all the instructions in the set are completed. This means that there is a fixed relationship between each instruction's position in the instruction stream and the instruction number used for resource assignment.

For example, in an instruction stream with an instruction window of 4 instructions every fourth instruction maps to instruction A (i.e., the first instruction in the window). This technique makes re-mapping of instruction very simple. In this case a 4-to-1 multiplexer is all that is necessary for each resource to forward a single instruction to that resource. However, the fixed format requires that the instruction window be advanced by a fixed amount, which results in somewhat inefficient processing.

When an instruction retires (an instruction can retire after it has been executed without exception and when all previous instructions have been executed and their results are stored in the register file), its result is moved into a main register file (i.e., the programmable visible register file) and if any instructions were dependent on that instruction, their renamed sources are not needed anymore. In the architecture disclosed in the '719 application, all instructions' sources are renamed every cycle. This renaming technique requires many comparators for performing the dependency checks. More specifically, the source register addresses of each instruction must be compared to the destination register addresses of all preceding instructions in the instruction window every cycle.

What is desired is a more efficient register renaming technique requiring less comparators and permitting the processor to execute instructions in parallel and out of order.

Summary of the Invention

The present invention is directed to a system and method for performing register renaming of source registers on a per-cycle basis only for new instructions added to the instruction window in that cycle. The present invention thus reduces the total number of dependency check comparators necessary for performing register renaming.

A preferred embodiment of the present invention comprises storing the instructions in a variable advance instruction window, and assigning a tag to each instruction in the instruction window. The tag of each retired instruction is assigned to the next new instruction to be added to the instruction window. The results of instructions executed by the processor are stored in a temp buffer according to their

corresponding tags to avoid output dependence and anti-dependencies. The temp buffer therefore permits the processor to execute instructions out of order and in parallel.

Data dependency checks are performed only for each new instruction added to the instruction window. Operands of the instructions having input dependencies are often located in the temporary buffer, and the source register addresses of those instructions having dependencies are renamed according to the tags of the operands located in the temp buffer. The renamed source register addresses are then stored in a rename result register file.

The foregoing and other features and advantages of the present invention will be apparent from the following more particular description of the preferred embodiments of the invention, as illustrated in the accompanying drawings.

Brief Description of the Drawings

The invention will be better understood if reference is made to the accompanying drawings. A brief description of the drawings is as follows:

FIG. 1 shows a representative block diagram of a DDC equal compare circuit of the present invention.

FIG. 2 shows a representative block diagram of an N-1 input priority encoder of the present invention.

FIG. 3 shows a representative block diagram of the tag assignment logic (TAL) of the present invention.

FIG. 4 shows a representative block diagram of the TAL and priority encoder circuit of the present invention.

FIG's. 5A and 5B show representative block diagrams of the register rename block of the present invention.

FIG. 6 shows a representative block diagram of the register rename register file of the present invention.

FIG. 7 shows a representative block diagram of the interconnection of the blocks of FIG's. 5B and 6.

FIG. 8 shows a representative high level block diagram including the RRC of the present invention.

FIG. 9 shows a representative block diagram of a circuit to generate the address for one register file port.

Detailed Description of the Invention

The terms processor, CPU, and digital processor are often used interchangeably in this field. The term "processor" is used hereafter with the understanding that other similar terms could be substituted therefore without changing the underlying meaning of this disclosure.

The present invention is directed to a Register Renaming Circuit (RRC) which is part of a processor. The RRC permits the processor to execute instructions in parallel and out of order. In a preferred embodiment of the present invention, the processor has a variable advance instruction window (VAIW) for holding instructions from an instruction stream prior to execution. The RRC can be used with a fixed advance instruction window as well.

The VAIW in a preferred embodiment holds eight instructions, and up to four new instructions can be added to the top four locations of the VAIW in any one cycle.

In a VAIW, any one of instructions I0, I1, I2 and I3 can be mapped into the first location in the window (location A, for example). Tags are assigned to the instructions as the instructions enter the VAIW. The tags are stored in a first-in-first-out buffer (hereafter called a FIFO; not shown).

As an instruction advances in the VAIW by a variable amount, the tag associated with that instruction also advances in the FIFO by the same amount. When a new instruction enters the VAIW it is assigned the tag of the most recent instruction to leave the VAIW, thus tags are reused. Instructions can leave the VAIW by either retiring, or they can be flushed out if a branch is taken.

The tag of each instruction leaving the instruction window is returned to the head of the FIFO and re-used by the new instruction added to the window. However, the first instruction and tag in the FIFO always progress in order, because instructions always retire in order.

According to the present invention only new instructions in the VAIW need be checked for dependencies. This eliminates the need for excess comparators. New instructions in the window are therefore passed through the RRC. In order to reduce complexity by renaming the source registers for only those instructions that are new in the instruction window on a per-cycle basis, two assumptions are made:

1. Each instruction's tag remains constant as long as the instruction remains in the window. This tag is also associated with the location in a temp buffer (discussed below) that the corresponding instruction's output will be stored.
2. At most, only a subset (I_n to I_{n-1}) of the instructions in the window (I_n to I_0) can be new in any given cycle.

In a preferred embodiment of the present invention, the temp buffer (or temporary buffer) is part of the main register file. The register file contains 40 registers; registers 0-31 are the main registers (commonly called the programmer visible registers), and registers 32-39 comprise the temp buffer. The temp buffer and main register file share the same read ports. Thus, to read the data from temp buffer address 4, {100100} would be the address on the read address port, for example.

In order to perform dependency checking in the present invention, an RRC Inputs Register File (RIRF) is used to hold the source and destination register addresses of all instructions in the instruction window. As new instructions enter the window an instruction fetch unit (IFU: not shown) sends the instructions' source and destination register addresses to the RIRF. The source and destination register addresses are stored in the RIRF by tag number. The RIRF has one output for each instruction in the window and the source and destination register addresses are read from the RIRF and sent to the RRC.

The RRC performs the data dependency checking and the register renaming. The data dependency check is done by the Data Dependency Checker (DDC) and the rename is performed by the Tag Assignment Logic (TAL).

There are three kinds of data dependencies: *input dependencies*, *anti-dependencies* and *output dependencies*. An instruction is input dependent on a previous instruction if one of its inputs is the previous instruction's output; an instruction is anti-dependent if the address of one of its source registers (RS) is the same as the address of a later instruction's destination register (RD); and an instruction is output dependent if the address of its destination register is the same as the address of another instruction's destination register.

Dependencies limit the amount of parallelism that a computer can exploit. For example, if instruction A is input dependent on instruction B, then instruction A must not be executed until after instruction B is executed. Also, if instruction A and B are output dependent and instruction A comes first in the program, then instruction A's result must be written to the main register file before instruction B's. Finally, if instruction A is anti-dependent on instruction B, then instruction B's result must not be written to the main register file until after instruction A has begun executing. Output and anti- dependencies are usually avoided by use of the temp buffer. Input dependencies cannot be avoided and are located by the DDC.

The DDC locates input dependencies by comparing the register file addresses of each instruction's sources with the register file addresses of each previous instruction's destination. If an instruction's input data comes from the same register file address as a previous instruction's output data, then they are dependent (the term "dependent" will be used to mean "input dependent" for the remainder of this description).

It is possible that an instruction can be dependent on several previous instructions. When this happens, the RRC assumes that the programmer intended that the instruction be dependent on the most previous instruction. For example, if instruction 5 depends on instructions 3 and 1, then the RRC would assume that the programmer intended instruction 5 to use instruction 3's results and not instruction 1's.

A DDC equal compare circuit 100 for checking dependencies between

instructions A and B in accordance with the present invention is shown in FIG. 1. The output ($A=B?$) of the DDC equal compare circuit 100 is sent to a priority encoder. A n-1 input priority encoder 200 is shown in FIG. 2. Priority encoder 200 checks the highest priority dependency for instruction n's source (I_nRS). The inputs at the top of priority encoder 200 are the data dependency comparisons of instruction n's source (I_nRS) with the destinations of all previous instructions ($I_{n-1}RD-I_0RD$), as determined by equal compare circuits 202. For example, if the x^{th} bit of the priority encoder output is asserted, then instruction n is input dependent on instruction x.

The present invention avoids the problems caused by output and anti-dependencies by storing the results of all instructions in the temp buffer and then moving the results into the main register file in program order. For example, if instruction 1 finishes before instruction 0, its result will be written to the register file after instruction 0's result is written to the register file. The use of the temp buffer allows the processor to execute instructions out of order and in parallel. Since the results of the instructions are moved to the main register file in order, output and anti-dependencies do not cause a problem.

Since the result of an instruction can sit in the temp buffer for a long time before it gets moved to the main register file, instructions that are dependent on that instruction will also have to wait. In order to improve performance, the present invention includes a means with which to use data that is in the temp buffer. That means is the Tag Assignment Logic (TAL).

The TAL determines the location in the temp buffer of the operands of dependent instructions. As noted above all instructions are assigned a tag that remains constant while the instruction is in the window, and there is one location in the temp buffer for each instruction in the window. Thus, the processor implementing the present invention uses the tag of an instruction as the temp buffer address of that instruction's result.

Since the TAL knows where every instruction's result is stored, and since it also knows (from the DDC) where the dependencies are between instructions, the TAL can determine the location in the temp buffer of each instruction's inputs.

A representative block diagram of a TAL 300 used to determine the location of instruction n's source (RS) is shown in FIG. 3. The outputs of the priority encoder are connected as select lines (as shown generally at 302) to select the I_{n-1} through I_0 TAGs, which are input at the top of TAL 300. TAL 300 thus outputs the temp buffer address of instruction n's source.

A complete rename circuit for instruction n's source register is shown in FIG. 4. The term for the renamed register file address of instruction n's source is *INRS_TAG*.

A representative block diagram of a rename circuit 500 of the present embodiment is shown in FIG. 5A. The address of a new instruction's source register

(I_nRS) is shown input at the top of the rename circuit 500. The destination register addresses of all preceding instructions in the window are input to rename circuit 500, as shown generally at 502. In addition, all the tags of all preceding instructions in the window are input to rename circuit 500, as shown generally at 504. Rename circuit 500 outputs a tag for the new instruction's source register (I_nRS), as shown at 506. The new I_nRS tag is assigned by rename circuit 500 according to any dependencies, as discussed above in connection with the other embodiment(s). If the instruction has no dependencies the address input at the top input is simply passed to the output. Given a VAIW of 8 instructions and assuming that the temp buffers 116 have the 8 highest addresses of the 40 total registers, the most significant bit of the rename circuit 500 output indicates whether the result is in the main register file or the temp buffer.

Renaming circuits 508 for renaming the source registers of a plurality of instructions are shown in FIG. 5B. The number "i" in FIG. 5B corresponds to the maximum number of instructions in the window that can be new. In a preferred embodiment "i" is equal to 3; thus requiring 4 rename circuits.

Because renaming only happens when a new instruction enters the window, some technique is needed to store the outputs of the RRC. One technique would be to store the RRC results in a FIFO whenever the instruction window advances. The present embodiment, however, stores the renamed registers in a separate register file (discussed below). Since each instruction's tag stays constant, the renamed source register results from the rename circuits can be stored by tag number. The register file for storing the rename results therefore has one write port for each new instruction in the window and one read port for each instruction in the window.

A representative block diagram of a rename result register file (RRRF) 600 is shown in FIG. 6. The renamed results are input as "WRITE DATA", as shown generally at 601. "READ ADDRESS" and "WRITE ADDRESS" tags are input to register file 600, as shown generally at 602 and 604, respectively. Renamed results for all the sources of all instructions in the window are available as "READ DATA", as shown generally at 606. FIG. 7 shows rename circuits 508 connected to rename result register file 600.

When an instruction retires its result is moved into the main register file. If any instructions were dependent on that instruction, their renamed sources are not needed anymore.

The area to which new instructions can enter the instruction window (in this embodiment the area is the top four locations), are those locations which are register renamed. Once an instruction leases that area of the window it is no longer renamed. The RRC of the present invention renames an instruction's source register when it enters the window, so there needs to be a mechanism to detect which instructions' sources have been moved to the register file and to replace the renamed source

register address with the original source register address. The first part of that mechanism is called MONDEP (as in "monitor dependencies") and the second part is called RFMXING. In addition, a source register ready generator (RDY_GEN) is used to determine when each instruction's sources are available.

5 A representative high level block diagram of the RIRF, RRC, RRRF, MONDEP, RDY_GEN and RFMXING (labeled as 802, 804, 600, 806, 808 and 810, respectively) is shown in FIG. 8. Each block 802, 804, 600, 806, 808 and 810 receives the tags of all instructions in the instruction window from the tag FIFO (not shown). Implementation of the tag FIFO will become obvious to one skilled in the art.

10 Source and destination register addresses of new instructions from the IFU (not shown) are sent to RIRF 802 via a bus 812, and are accessed by RRC 804 via a bus 814. The source registers of all instructions are passed to RFMXING 806 via a bus 816. Renamed source registers of all instructions are stored in RRRF 600 via a bus 818. The stored renamed source registers of all instructions are passed to

15 RFMXING 806, MONDEP 808 and RDY_GEN 810 via a bus 820.

MONDEP 808 determines which dependencies have disappeared by comparing the tags of retiring or recently-retired instructions with the lower three bits of the renamed sources of each instruction. Information regarding retired instructions is sent to MONDEP 808 via a bus 828 from a retirement unit (not shown; the details of a retirement unit that can be used to generate these signals is disclosed in co-pending, commonly owned patent application Ser. No. 07/877,451, filed 5/15/92). If there is a match, then MONDEP 808 knows that the dependency has been removed and the outputs of MONDEP 808 outputs which instructions' inputs have been moved from the temp buffer to the register file. These outputs signals are

20 sent to RFMXING 806 and RDY_GEN 810 via buses 822.

In a preferred embodiment of the present invention, the instruction window holds eight instructions. Each cycle, at most three of those instructions can be retired. In the cycle after an instruction is retired, its tag is moved to the top of the FIFO. Therefore, to check what dependencies have been removed, MONDEP 808

30 compares each of the renamed sources of each instruction with the tags of the top three instructions in the FIFO. In a further embodiment MONDEP 808 can compare each renamed source with the tags of the instructions at the bottom of the FIFO that are about to be retired.

MONDEP 808 outputs a bit for each source of each instruction and the bits

35 are sent to RFMXING and RDY_GEN blocks in the RRC. These bits are asserted when an instruction's dependency goes away and remain asserted until the instruction is retired.

RDY_GEN 810 determines when each instruction's sources are available and outputs this information via a bus 830. The difference between MONDEP 808 and

40 RDY_GEN 810 is MONDEP 808 only monitors when instructions retire. An

instruction does not have to wait until another instruction retires to use its result; it only needs to wait until it is done (an instruction is done when its result is entered into the temp buffer). Also, if an instruction has no dependencies, then it can be executed immediately. Information concerning whether an instruction is "done" is input to
5 RDY_GEN 810 via a bus 832. "Done" signals come from done control logic (not shown). In connection with the present invention, the term "done" means the result of the instruction is in a temporary buffer or otherwise available at the output of a functional unit. (An example of done control logic may be found the '719 application.)

RDY_GEN 810 has one output for each source of all instructions in the
10 window. The output for a particular instruction's source is assured if one of three conditions is true:

The source was never dependent on any other instruction.

The instruction that the source was dependent on is done and its result is in the temp buffer.

15 The instruction that the source was dependent on is retired and its result has been moved from the temp buffer to the register file.

These outputs 830 of RDY_GEN 810 go to the ISSUER which determines which instruction(s) is to issued based on functional unit availability and lack of dependencies.

20 RFMXING 806 is used to generate the read addresses of the register files. It contains a collection of muxes for each read port of each register file. These muxes are selected by the outputs of the ISSUER and MONDEP 808. Read addresses for each port of each register file are output by RFMXING 806, via a bus 824. (A processor may have a separate register file for a floating point subprocessor and an
25 integer subprocessor, for example.)

The circuit to generate the address for one register file port is shown in FIG. 9. The ISSUER decides which instructions to execute and which register file ports to use for each instruction by sending select signals via a bus 826 to RFMXING 806. MONDEP 808 decides which instructions sources have been moved from the register
30 file and which are still inside the temp buffer via bus 822. For example, if one assumes that the ISSUER decides to execute instruction I_n and I_n is dependent on I_{n-1} ; then the ISSUER will select (via select signals 826) two top multiplexers (mux) 902 and 904 and choose I_nRS (I_n 's original source register address) and I_nRS_TAG . If it has, MONDEP 808 will select, using a third mux 906, the output of
35 mux 902 on the left and send I_nRS to the register file. If not, it will choose the output of mux 904 on the right and send the I_nRS_TAG to the register file.

While various embodiments of the present invention have been described above, it should be understood that they have been presented by way of example, and not limitation. Thus the breadth and scope of the present invention should not be
40 limited by any of the above-described exemplary embodiments, but should be defined

only in accordance with the following claims and their equivalents. All cited patent documents and publications in the above description are incorporated herein by reference.

Claims

What is claimed is:

1. A system for performing register renaming of source registers in a processor having an instruction window for storing a group of instructions to be executed by the processor, wherein new instructions are added to the instruction window when the processor retires preceding instructions, the system comprising:

5 first means for storing source and destination register addresses for the instructions in the instruction window;

second means, coupled to said first means, for accessing said stored source and destination register addresses for performing a data dependency check for each new instruction added to the instruction window; and

10 third means, coupled to said second means, for renaming source register addresses for instructions having dependencies as determined by said second means.

2. The system of claim 1, wherein the system further comprises a rename result register file for storing said renamed source register addresses.

15 3. The system of claim 1, wherein the instruction window is a variable advance instruction window.

4. The system of claim 3, wherein instructions in the variable advance instruction window are assigned a tag, and the tag of an instruction leaving the window is assigned to the next new instruction to be added to the variable advance
20 instruction window.

5. The system of claim 1, wherein said dependencies are input dependencies.

6. The system of claim 1, wherein:

said second means determines whether more than one dependency exists; and

25 a priority encoder, coupled to said second and third means, which selects a highest priority dependency identified by said second means and passes said highest priority dependency to said third means.

7. The system of claim 6, wherein said system further comprises a temp buffer means for storing results of instructions executed by the processor according to said
30 tags to avoid output and anti-dependencies, wherein said temp buffer permits the processor to execute instructions out of order and in parallel.

8. The system of claim 7, wherein said third means comprises tag assignment logic for determining where in said temp buffer operands of dependent instructions are located according to said highest priority dependency.
9. The system of claim 8, wherein said system further comprises means for
5 passing the results stored in said temp buffer to a main register file in program order.
10. A method for performing register renaming of source registers in a processor having a variable advance instruction window for storing a group of instructions to be executed by the processor, wherein new instructions are added to the variable advance instruction window when a location becomes available therein, the method
10 comprising the steps of:
- storing source and destination register addresses for the instructions in the variable advance instruction window;
 - assigning a tag to each instruction in the variable advance instruction window, wherein the tag of each retired instruction is assigned to the next new
15 instruction to be added to the variable advance instruction window;
 - storing, in a temp buffer, results of instructions executed by the processor according to their corresponding tags to avoid output and anti-dependencies, said temp buffer permitting the processor to execute instructions out of order and in parallel;
 - 20 performing data dependency checks for input dependencies for each new instruction added to the variable advance instruction window;
 - determining where operands are located in the temp buffer for the instructions having input dependencies as determined by step (d);
 - renaming source register addresses of the instructions having
25 dependencies; and
 - storing said renamed source register addresses in a rename result register file.
11. The method of claim 10, further comprises the step of passing the results stored in the temp buffer to a main register file in program order.

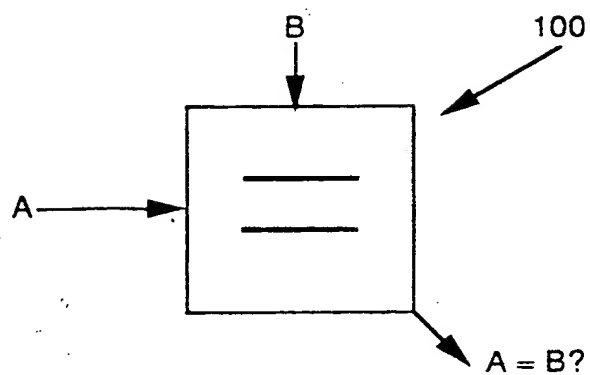


FIG. 1

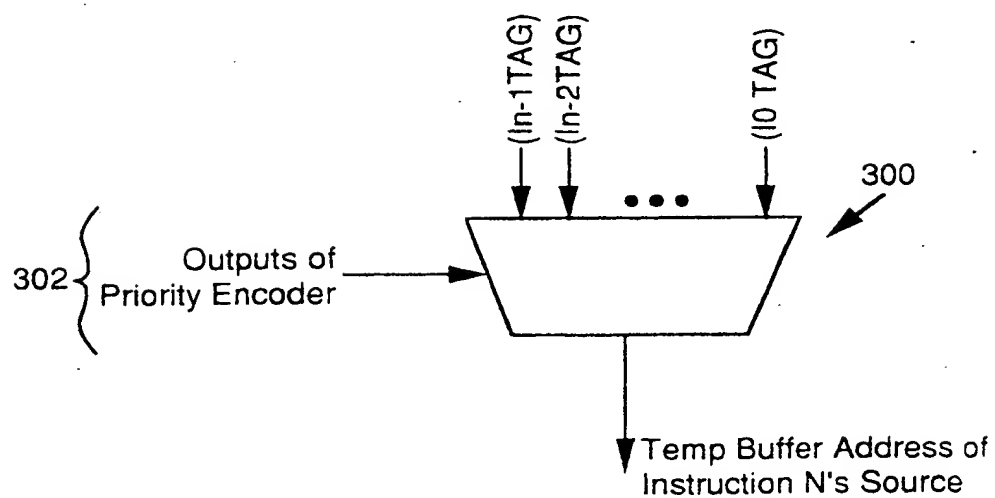


FIG. 3

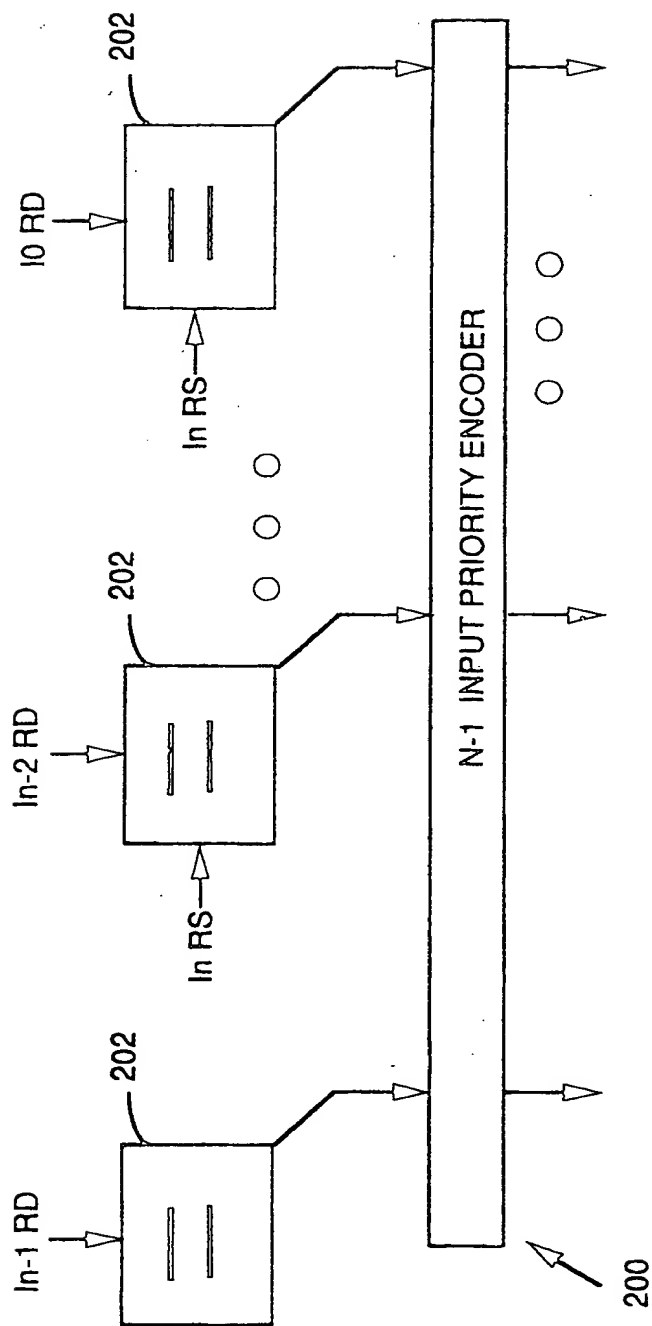


FIG. 2

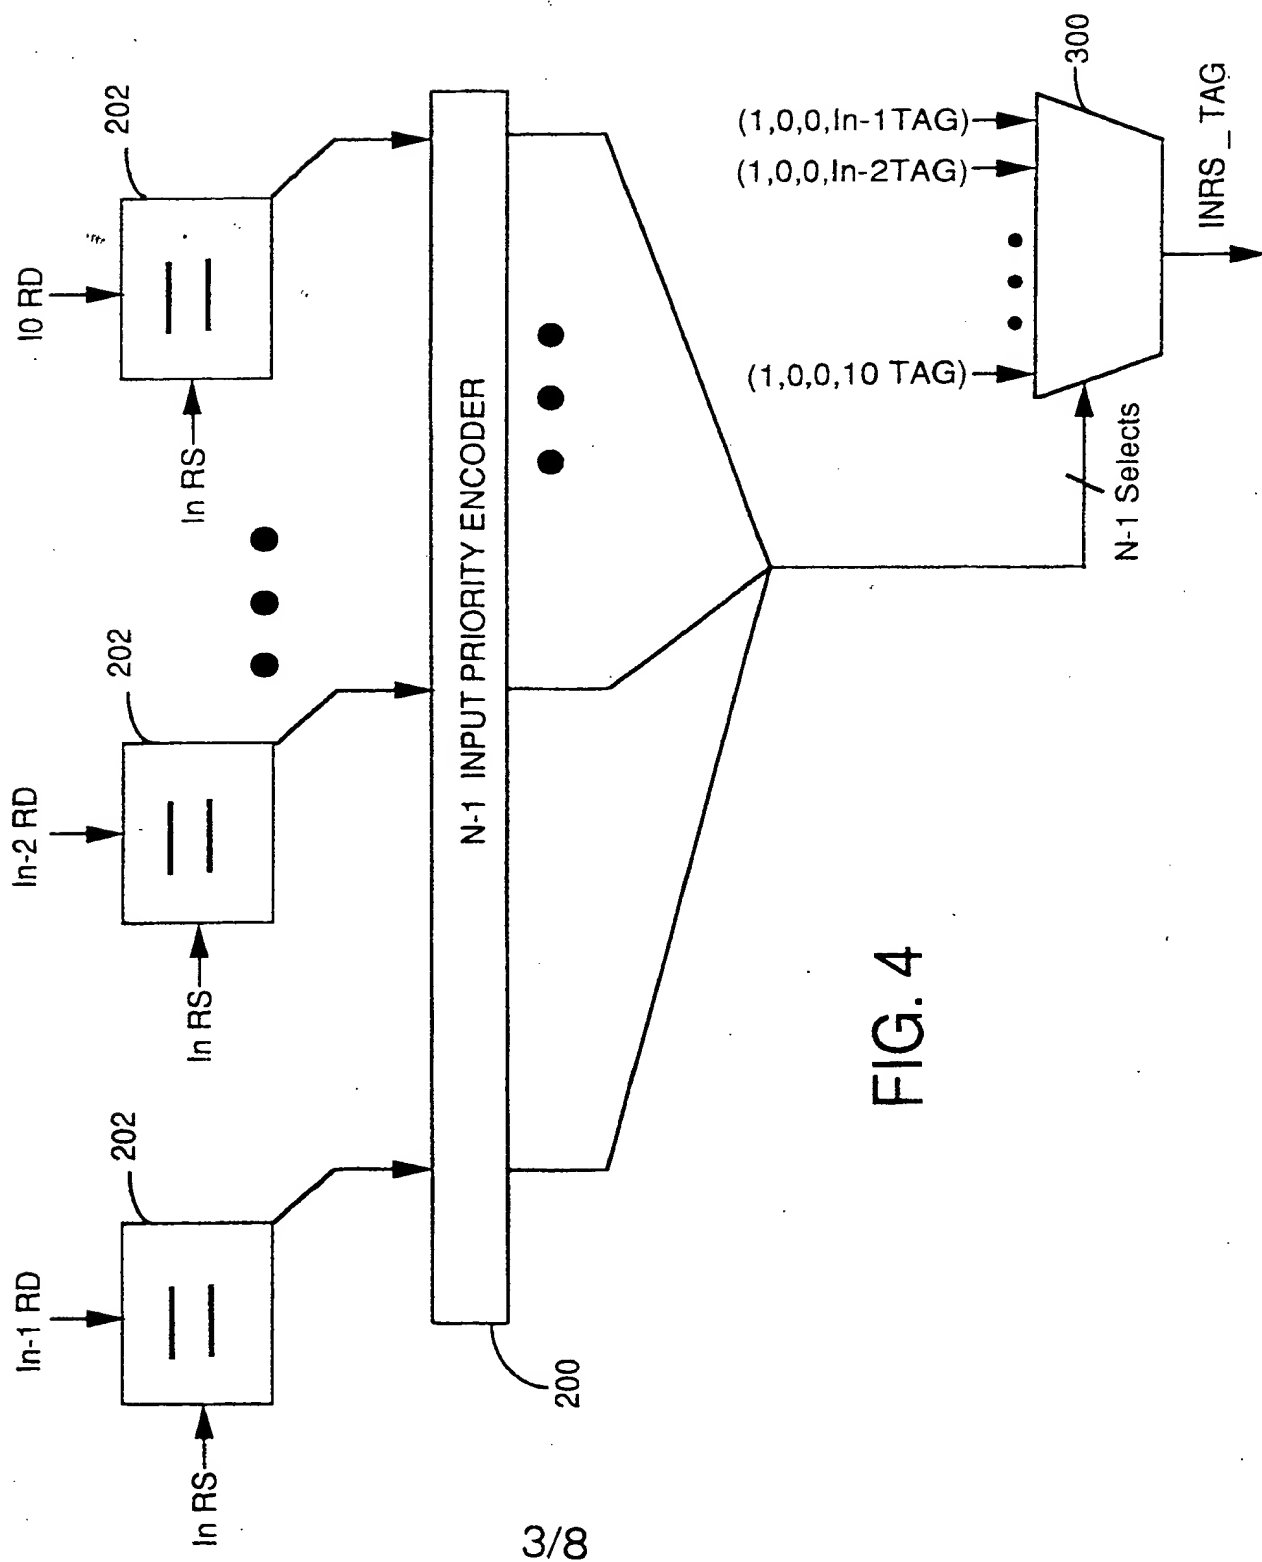


FIG. 4

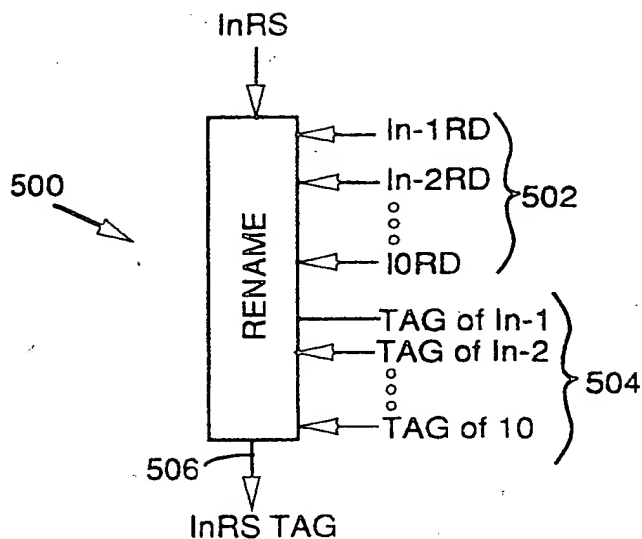


FIG. 5A

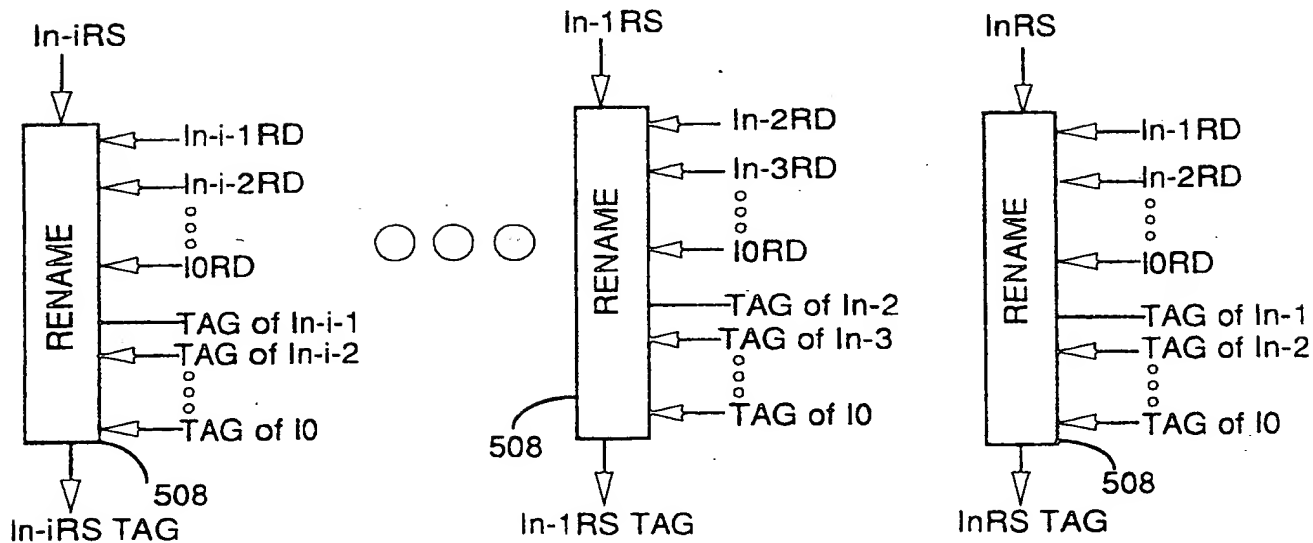


FIG. 5B

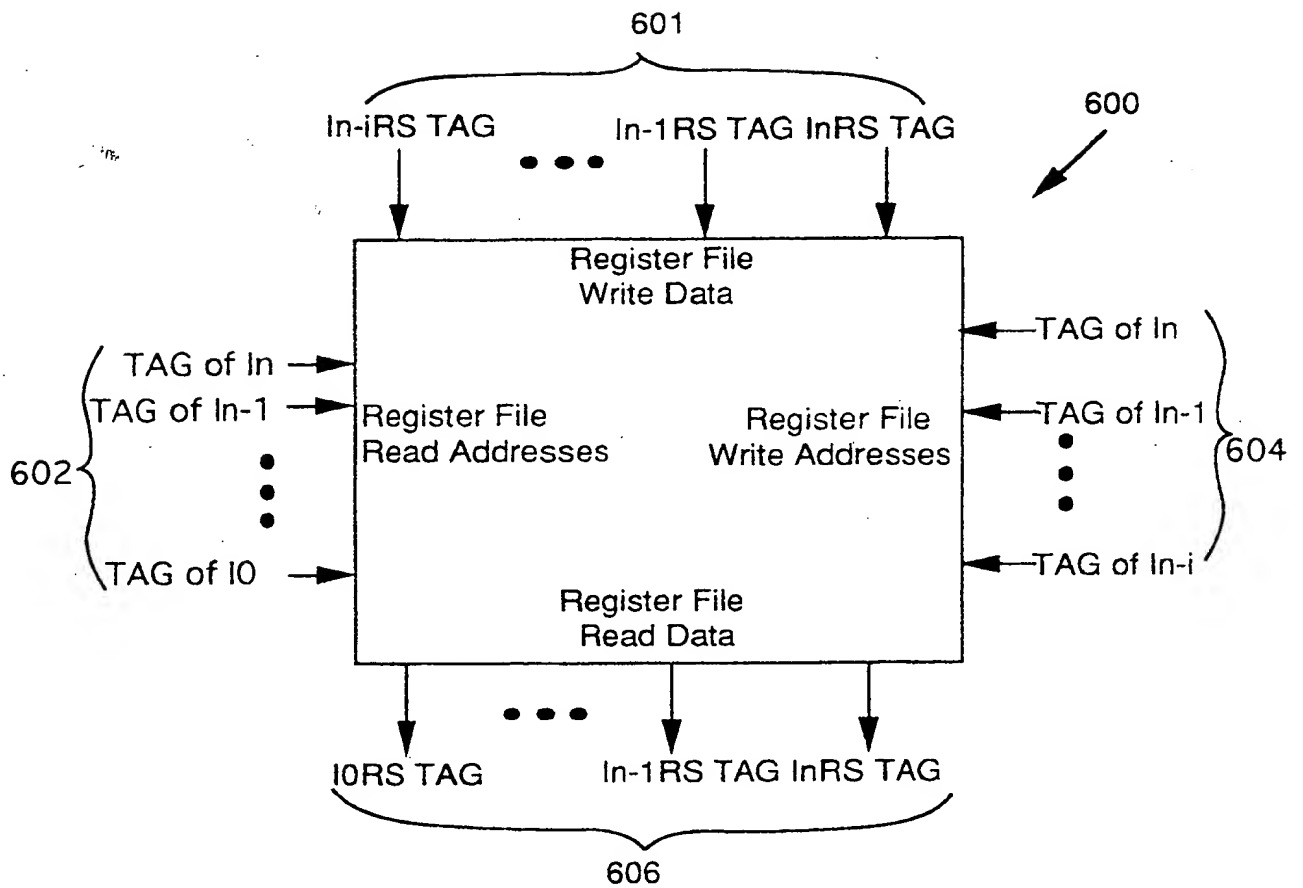
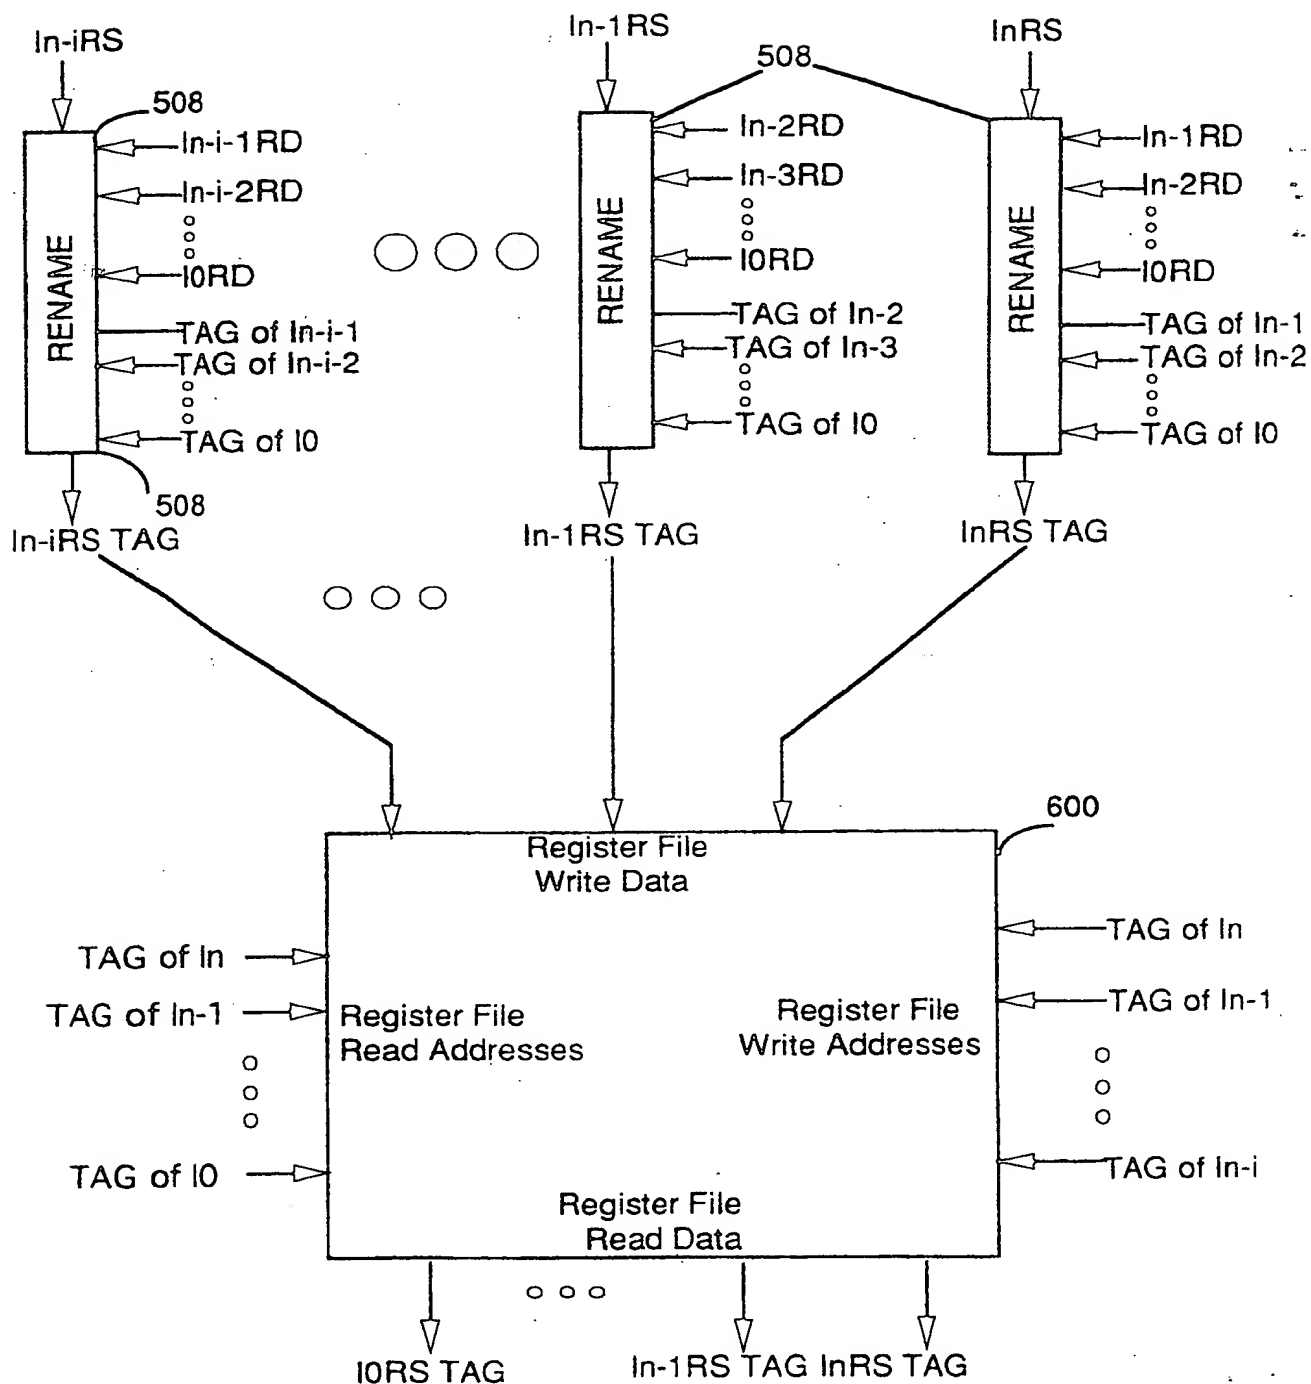


FIG. 6

FIG. 7
6/8

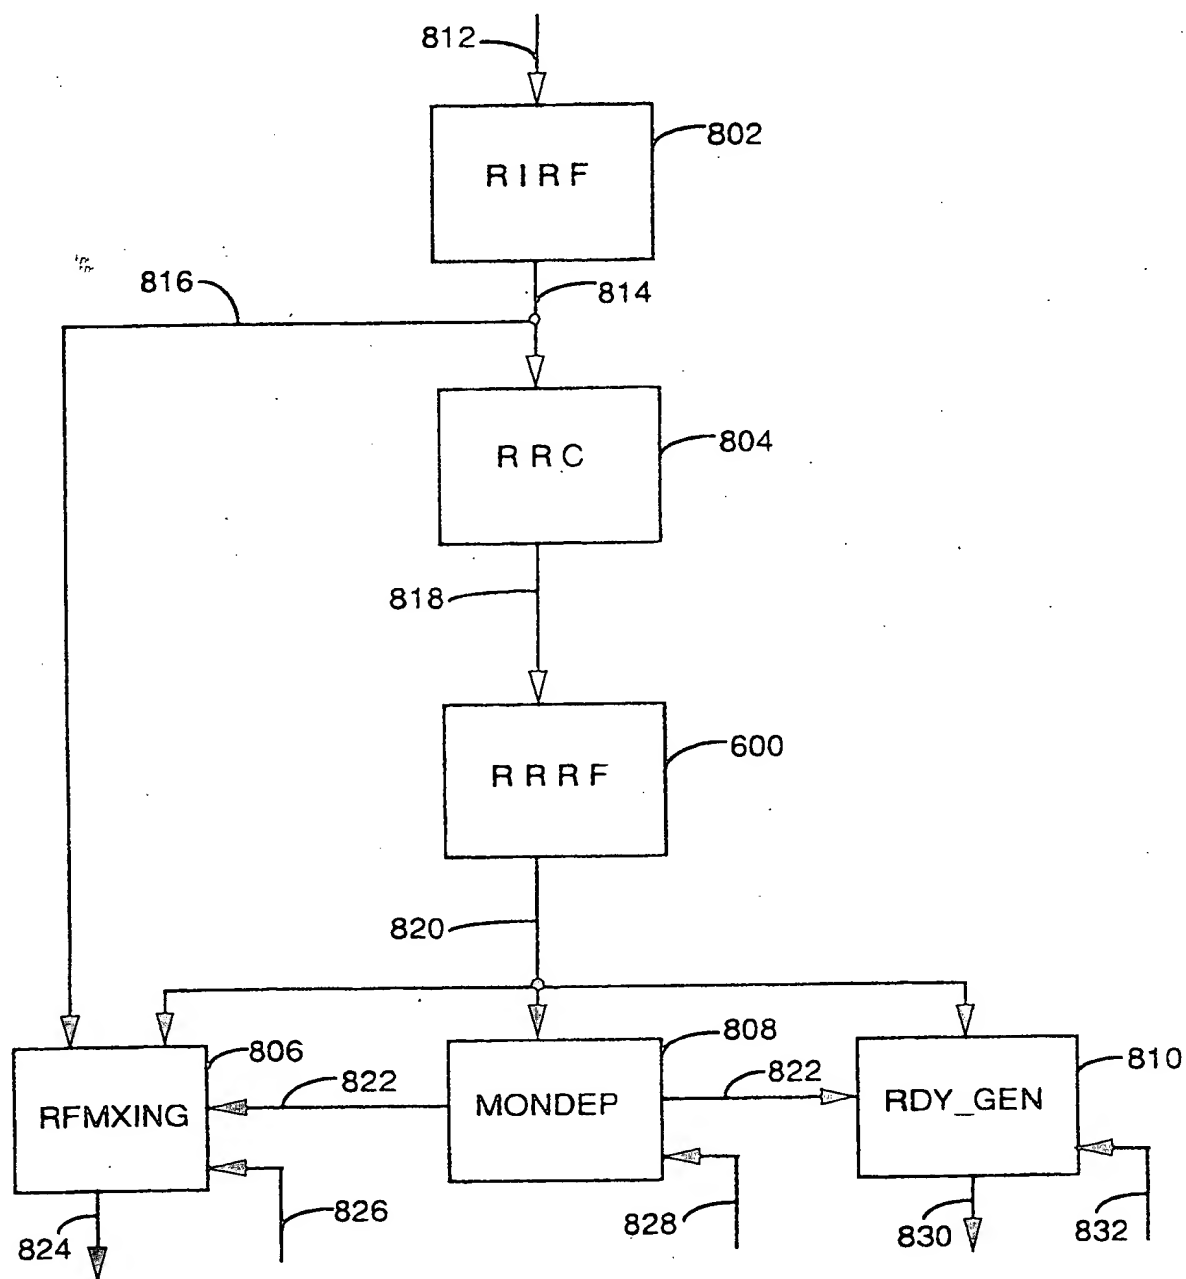


FIG. 8

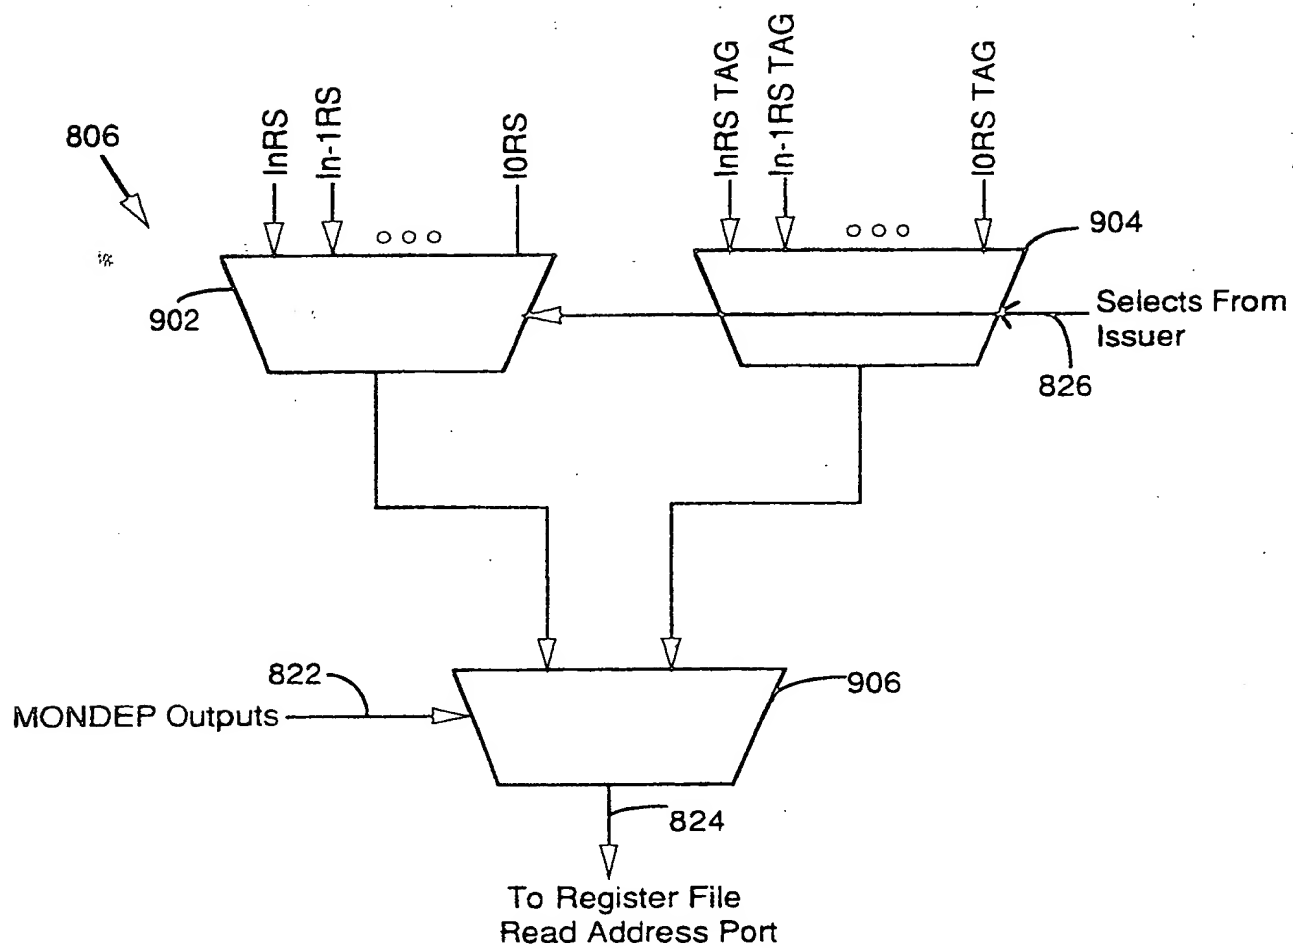


FIG. 9

INTERNATIONAL SEARCH REPORT

Intern. Appl. No.

PCT/US 93/12308

A. CLASSIFICATION OF SUBJECT MATTER
IPC 5 G06F9/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 5 G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	WO,A,93 20505 (SEIKO EPSON CORPORATION) 14 October 1993 cited in the application see the whole document ----	1,5-9
X	IEEE MICRO. vol. 11, no. 3, June 1991, LOS ALAMITOS, CA, US pages 10-13 - 63-73 V. POPESCU ET AL. 'The Metaflow Architecture' see page 63: 'The DRIS' ----	1,3-11
P,X	EP,A,0 533 337 (ADVANCED MICRO DEVICES, INC.) 24 March 1993 see column 2, line 25 - column 4, line 26 ----- -/-	1,3,5-9

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

15 March 1994

Date of mailing of the international search report

11.04.94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Daskalakis, T

INTERNATIONAL SEARCH REPORT

Intern. Patent Application No

PCT/US 93/12308

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>COMPUTER ARCHITECTURE NEWS vol. 17, no. 2, April 1989, NEW YORK US pages 290 - 302 M. D. SMITH ET AL. 'Limits on Multiple Instruction Issue' see page 293, left column, paragraph 2 - page 294, right column, paragraph 1 see page 296, right column, paragraph 3 - page 297, left column, paragraph 3</p>	3,5,7,9

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 93/12308

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9320505	14-10-93	NONE	
EP-A-0533337	24-03-93	NONE	

This Page Blank (uspto)

This Page Blank (uspto)

